



Model Number CB3-AL-TF-56C-2-B-D-.33-230|460-60

MFG PN T56 1/3U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	0.33 HP	Frame Size	56
Rated Motor Speed	3520 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	15
Rated Motor Current	1.24/0.62 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	55
KVA Code	M	Insulation Class	F
Nominal Efficiency	72 %	Tropicalization	YES
Nominal Power Factor	0.7 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	0.69 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	26.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	335	4.56	Rated Altitude (M)	1000
Breakdown	-	417	-	Coating	7024 - Graphite Grey
Pull Up	-	276	-	Shaft Grounding	YES
125% of FL	3510	-	0.68	Brake Voltage (DC)	
75% of FL	3547	-	0.55	Brake Torque (N-M)	
50% of FL	3564	-	0.51	Mechanical Data	
No Load		-	0.48		

Hazardous Location	Class 1, Div2 Grp A,B,C, D			Bearing DE Side	6204 ZZ
				Bearing NDE Side	6204 ZZ
				Moment of Inertia	kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH 9 Lead Dual Voltage		



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD

Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

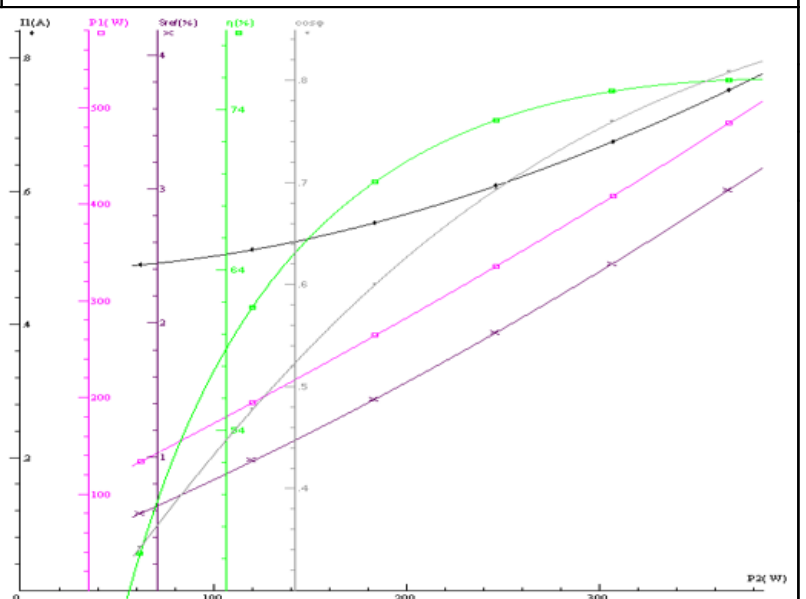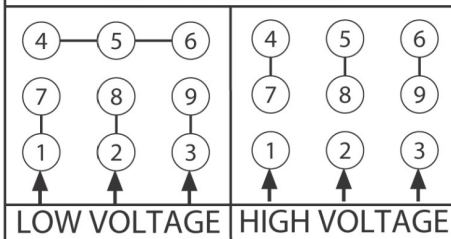

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 56C

HP:

RPM:

PHASE: 3

VOLT: 230/460V

ENCL: TEFC

FREQ: 60 Hz

FLA:

LRA:

