TECHTOP electric motors	**Model Number**	**CB3-AL-TF-56C-2-B-D-.5-230|460-60**
	MFG PN	**--**
	List Price	**--**

All data shown at HIGH voltage setting — Format: STD 3 Phase

Electrical Data		**General Data**	
Rated Motor Output Power	0.5 HP	Frame Size	56
Rated Motor Speed	3490 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230|460-60 Volts - HZ	Approximate Weight	16
Rated Motor Current	1.74/0.87 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	55
KVA Code	L	Insulation Class	F
Nominal Efficiency	74 %	Tropicalization	YES
Nominal Power Factor	0.72 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	1.01 Ft-Lb	Cable Entry	■"-14 NPT
Temp Rise @ Full Load °C	26.2	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	**RPM**	**Trq %FL**	**Current Amps**	Rated Ambient (°C)	40
Locked Rotor	-	315	5.83	Rated Altitude (M)	1000
Breakdown	-	380	-	Coating	7024 - Graphite Grey
Pull Up	-	304	-	Shaft Grounding	YES
125% of FL	3460	-	0.94	Brake Voltage (DC)	--
75% of FL	3521	-	0.73	Brake Torque (N-M)	--
50% of FL	3541	-	0.67	**Mechanical Data**	
No Load	--	-	0.63	Bearing DE Side	6204 ZZ
Hazardous Location	**Class 1, Div2 Grp A,B,C, D**			Bearing NDE Side	6204 ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	**Loaded Torque Curves**	**--**
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosϕ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	**323353**	**224693**	096A


Wiring Diagram — **3PH 9 Lead Dual Voltage**

3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD


Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

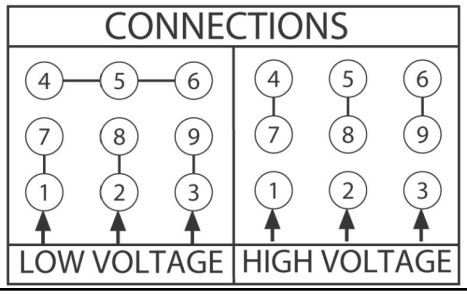

Model Number	CB3-AL-TF-56C-2-B-D-.5-230|460-60
MFG PN	--
List Price	--
Base Frame	CB-56C-AL-TF

FRAME: 56C	HP:	RPM:	PHASE: 3	VOLT: 230/460V	ENCL: TEFC	FREQ: 60 Hz	FLA:	LRA:

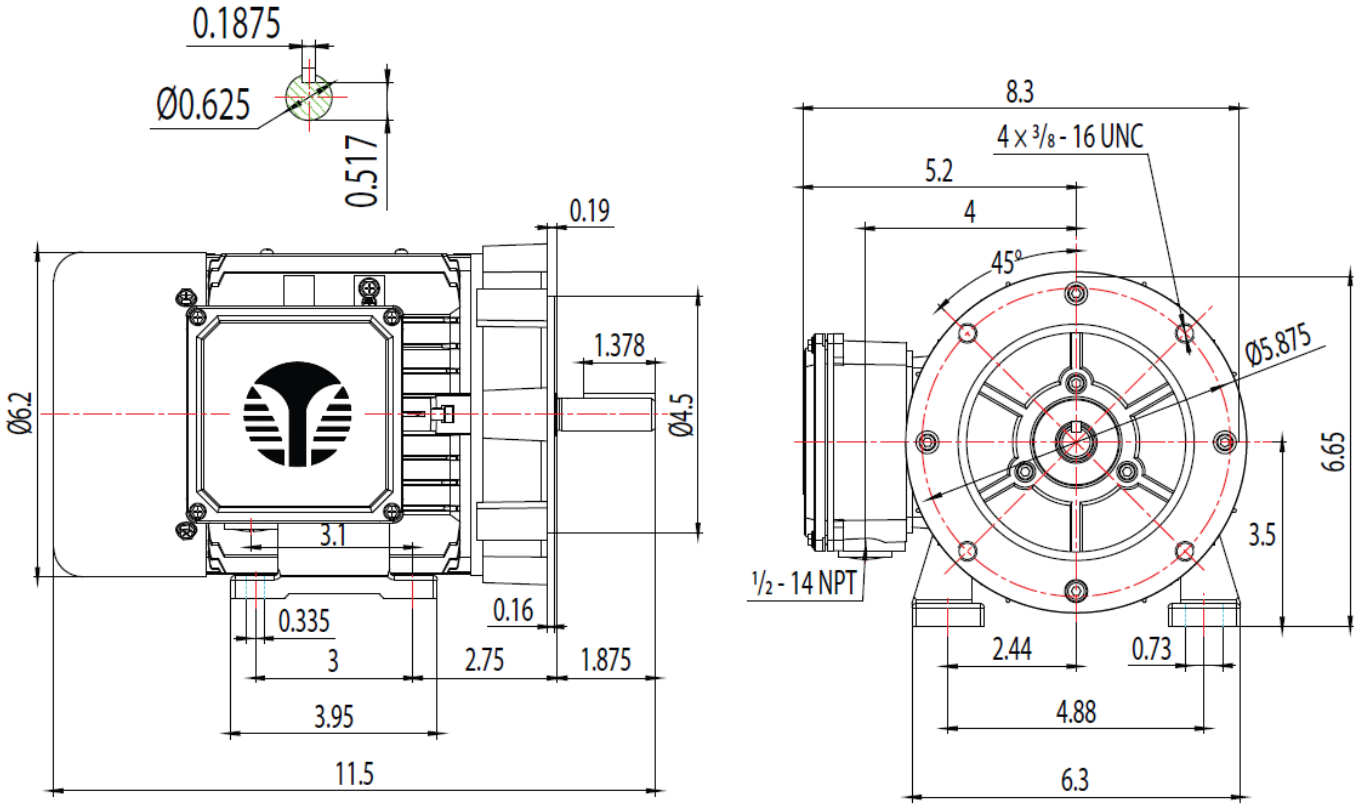

MODEL NUMBER:	REV.	BY	DATE	CHANGES
CB3-AL-TF-56C	1			
MFG PN:	2			
	3			
	4			
	5			
	6			
	7			

MATERIAL: ALUMINUM
UNITS: INCH BY: SSEE
DRAWN: 1/3/2019
WWW.TECHTOP.COM