



Model Number CB3-AL-TF-56C-2-B-D-.5-230|460-60

MFG PN T56 1/2U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	0.5 HP	Frame Size	56
Rated Motor Speed	3490 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	15.44
Rated Motor Current	1.74/0.87 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	55
KVA Code	L	Insulation Class	F
Nominal Efficiency	74% %	Tropicalization	YES
Nominal Power Factor	0.72 cosθ	Duty	cont
Full Load Torque Ft-Lb	1.01 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	26.2	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	315	5.83	40	
Breakdown	-	380	-	Rated Altitude (M)	
Pull Up	-	304	-	1000	
125% of FL	3460	-	0.94	Coating	
75% of FL	3521	-	0.73	7024 - Graphite Grey	
50% of FL	3541	-	0.67	Shaft Grounding	
No Load	--	-	0.63	Yes	

Hazardous Location	Class 1, Div2 Grp A,B,C, D			Brake Voltage (DC)	
				--	
				Brake Torque (N-M)	

Loaded Torque Curves		Mechanical Data	
CT VFD Range		Bearing DE Side	6204ZZ
--		Bearing NDE Side	6204ZZ
		Moment of Inertia	-- kg.m2
		Noise Level	Per NEMA dB (A)

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A



Wiring Diagram	3PH 9 Lead Dual Voltage
----------------	-------------------------


3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD



Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

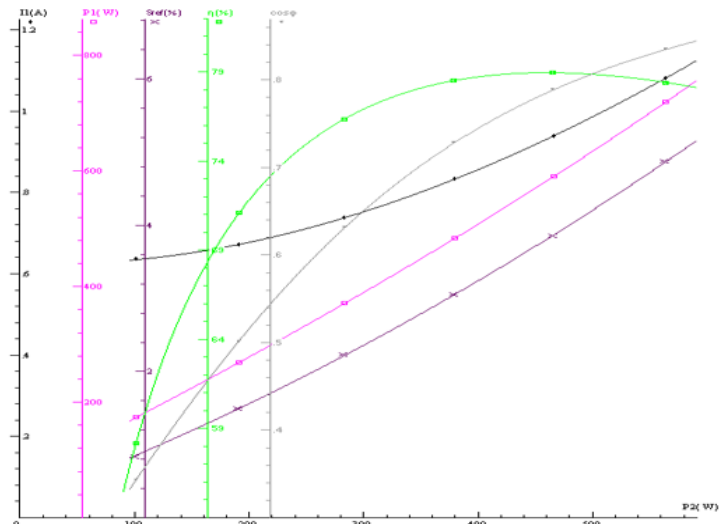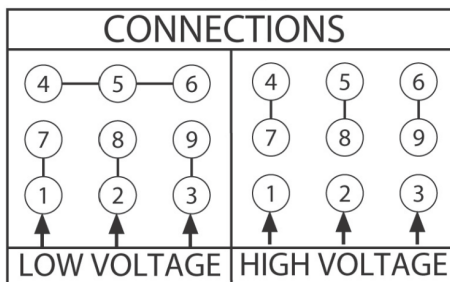

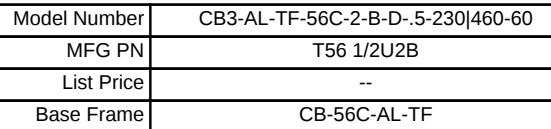

FRAME: 56C	HP:	RPM:	PHASE: 3	VOLT: 230/460V	ENCL: TEFC	FREQ: 60 Hz	FLA:	LRA:
------------	-----	------	----------	----------------	------------	-------------	------	------

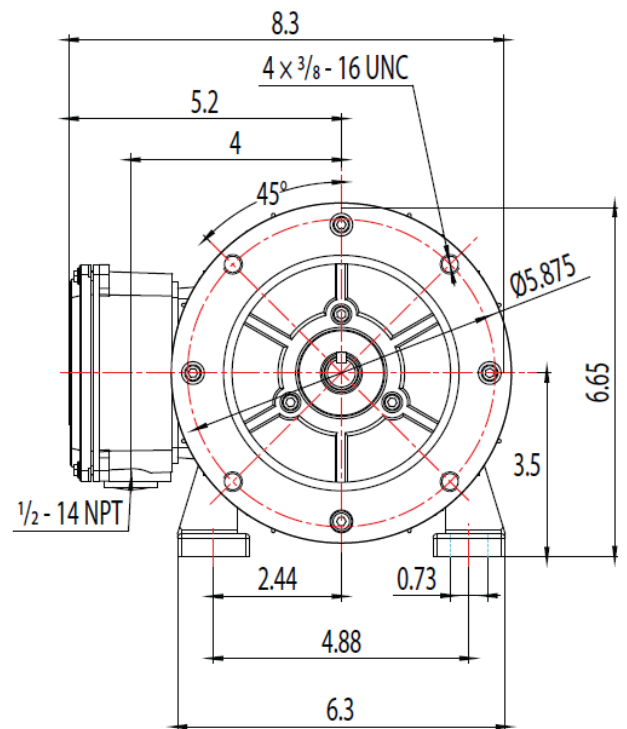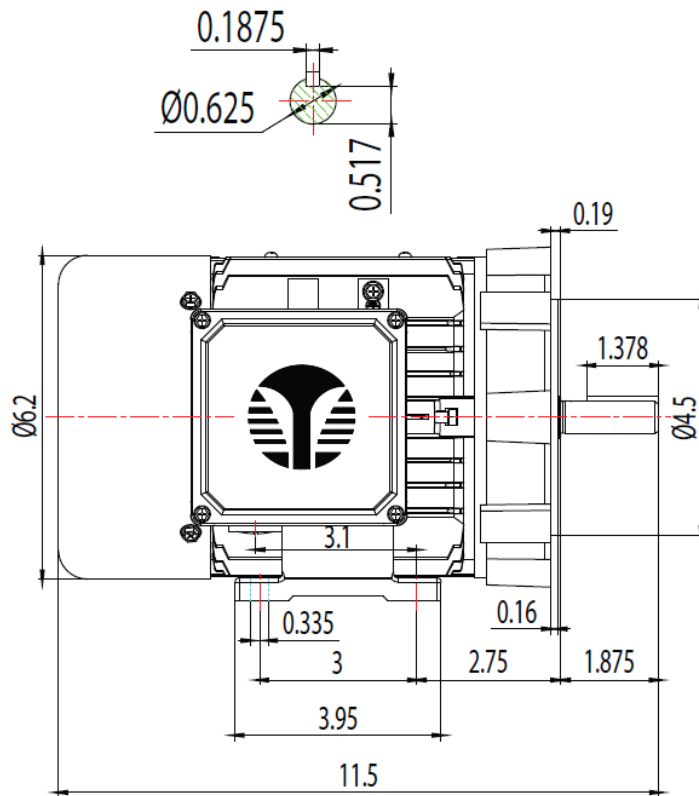

MODEL NUMBER:	REV.	BY	DATE	CHANGES
CB3-AL-TF-56C	1			
	2			
MFG PN:	3			
	4			
	5			
	6			
	7			

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540