



Model Number GR3-AL-TF-100LB34-4-B-D-3-230|460-60

MFG PN T100L1-4

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	3 HP	Frame Size	100
Rated Motor Speed	1760 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	--
Rated Motor Current	7.71/3.86 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	L	Insulation Class	F
Nominal Efficiency	89.5 %	Tropicalization	YES
Nominal Power Factor	0.8 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	8.799568 Ft-Lb	Cable Entry	M20 X 1.5
Temp Rise @ Full Load °C	29	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	302	73.23	Rated Altitude (M)	1000
Breakdown	-	402	-	Coating	7024 - Graphite Grey
Pull Up	-	241	-	Shaft Grounding	NO
125% of FL	1751	-	9.2	Brake Voltage (DC)	--
75% of FL	1772	-	6.36	Brake Torque (N-M)	--
50% of FL	1782	-	5.2	Mechanical Data	
No Load	1795.6	-	4.19		


Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6306ZZ
				Bearing NDE Side	6306ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead IEC Dual Voltage
----------------	-----------------------------

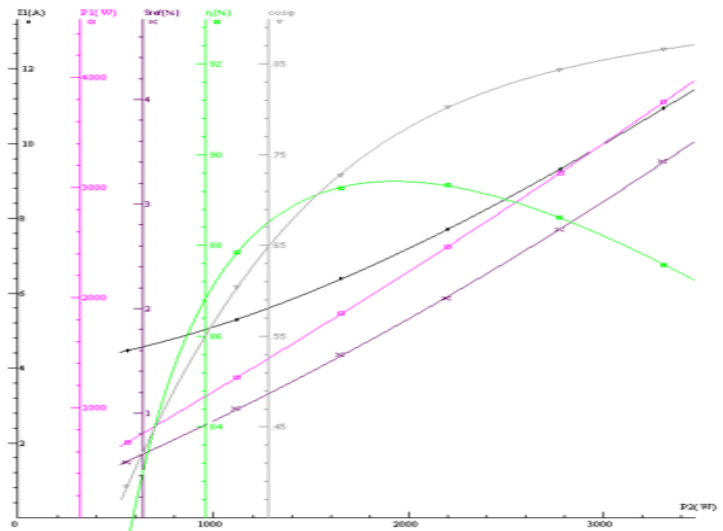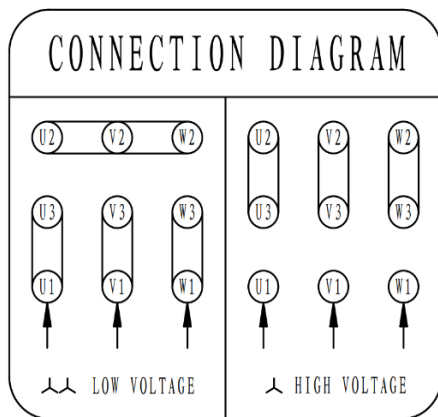

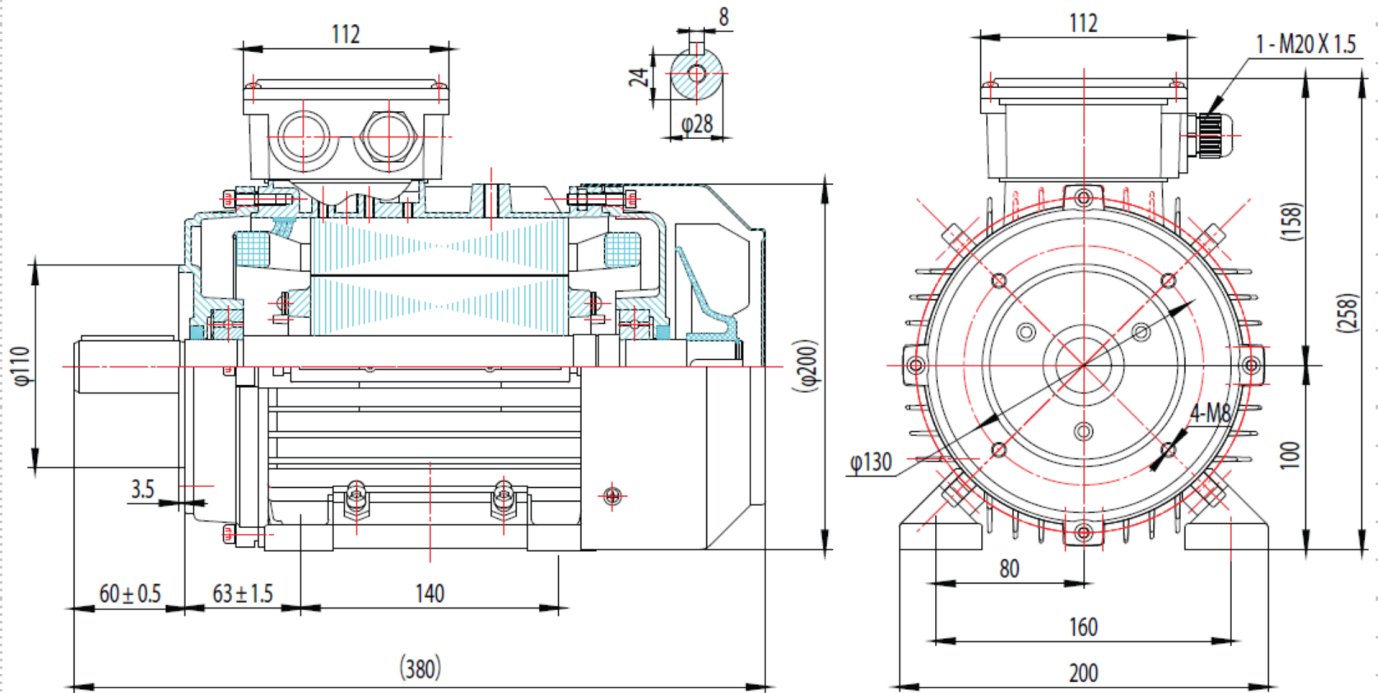

MODEL NUMBER	GR-100LB34-AL	ISSUE DATE:	04/2025
DIMENSIONS	in		
CASTING MATERIAL	ALUMINUM	WWW.TECHTOPIND.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540