



Model Number GR3-AL-TF-132SB3-2-B-D-10-230|460-60

MFG PN T132S2-2

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	10 HP	Frame Size	132
Rated Motor Speed	3520 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	112.2
Rated Motor Current	22.6/11.3 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	L	Insulation Class	F
Nominal Efficiency	90.2 %	Tropicalization	YES
Nominal Power Factor	0.92 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	15.024912 Ft-Lb	Cable Entry	M25 X 1.5
Temp Rise @ Full Load °C	49.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	277	113.9	Rated Altitude (M)	1000
Breakdown	-	395	-	Coating	7024 - Graphite Grey
Pull Up	-	154	-	Shaft Grounding	NO
125% of FL	3501.6	-	14.058	Brake Voltage (DC)	--
75% of FL	3544.9	-	8.6086	Brake Torque (N-M)	--
50% of FL	3563.9	-	6.2058	Mechanical Data	
No Load	--	-	3.031		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6308ZZ
				Bearing NDE Side	6308ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram 3PH 9 Lead IEC Dual Voltage

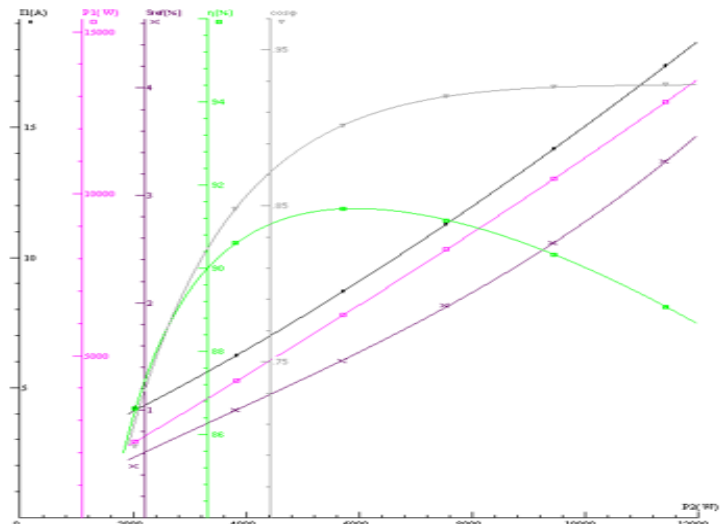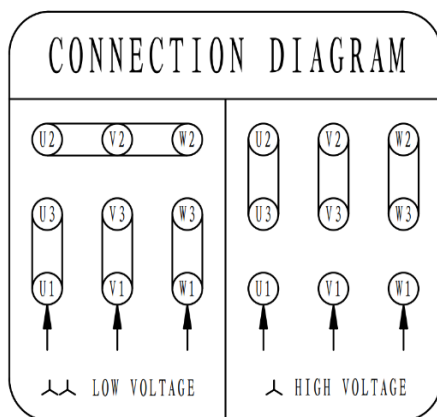

FRAME: 132SB3	HP:	RPM:	PHASE: 3	VOLT: 115/208-230V	ENCL: TEFC	FREQ: 60 Hz	FLA:	LRA:
---------------	-----	------	----------	--------------------	------------	-------------	------	------

