



Model Number	GR3-AL-TF-132SB3-2-B-D-7.5-230 460-60
MFG PN	T132S1-2
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	7.5 HP	Frame Size	132
Rated Motor Speed	3520 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	96.8
Rated Motor Current	17.0/8.48 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	89.5 %	Tropicalization	YES
Nominal Power Factor	0.91 cos θ	Duty	Cont.
Full Load Torque Ft-Lb	11.1517744 Ft-Lb	Cable Entry	M25 X 1.5
Temp Rise @ Full Load °C	51.5	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	257	80.91	Rated Altitude (M)	1000
Breakdown	-	365	-	Coating	7024 - Graphite Grey
Pull Up	-	175	-	Shaft Grounding	NO
125% of FL	3500	-	10.56	Brake Voltage (DC)	--
75% of FL	3543.4	-	6.5421	Brake Torque (N-M)	--
50% of FL	3562.8	-	4.8079	Mechanical Data	
No Load	--	-	2.562	Bearing DE Side	6308ZZ

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6308ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), $\cos\phi$ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead IEC Dual Voltage
----------------	-----------------------------

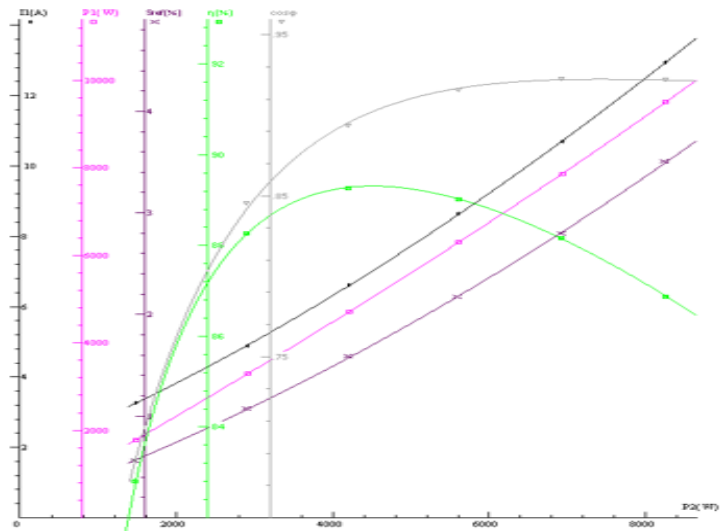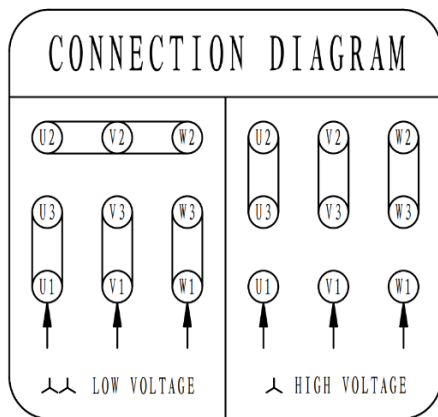




Model Number GR3-AL-TF-132SB3-2-B-D-7.5-230|460-60

MFG PN T132S1-2

List Price --

Base Frame GR-132SB3-AL-TF

FRAME: 132SB3 HP: RPM: PHASE: 3 VOLT: 115/208-230V ENCL: TEFC FREQ: 60 Hz FLA: LRA:

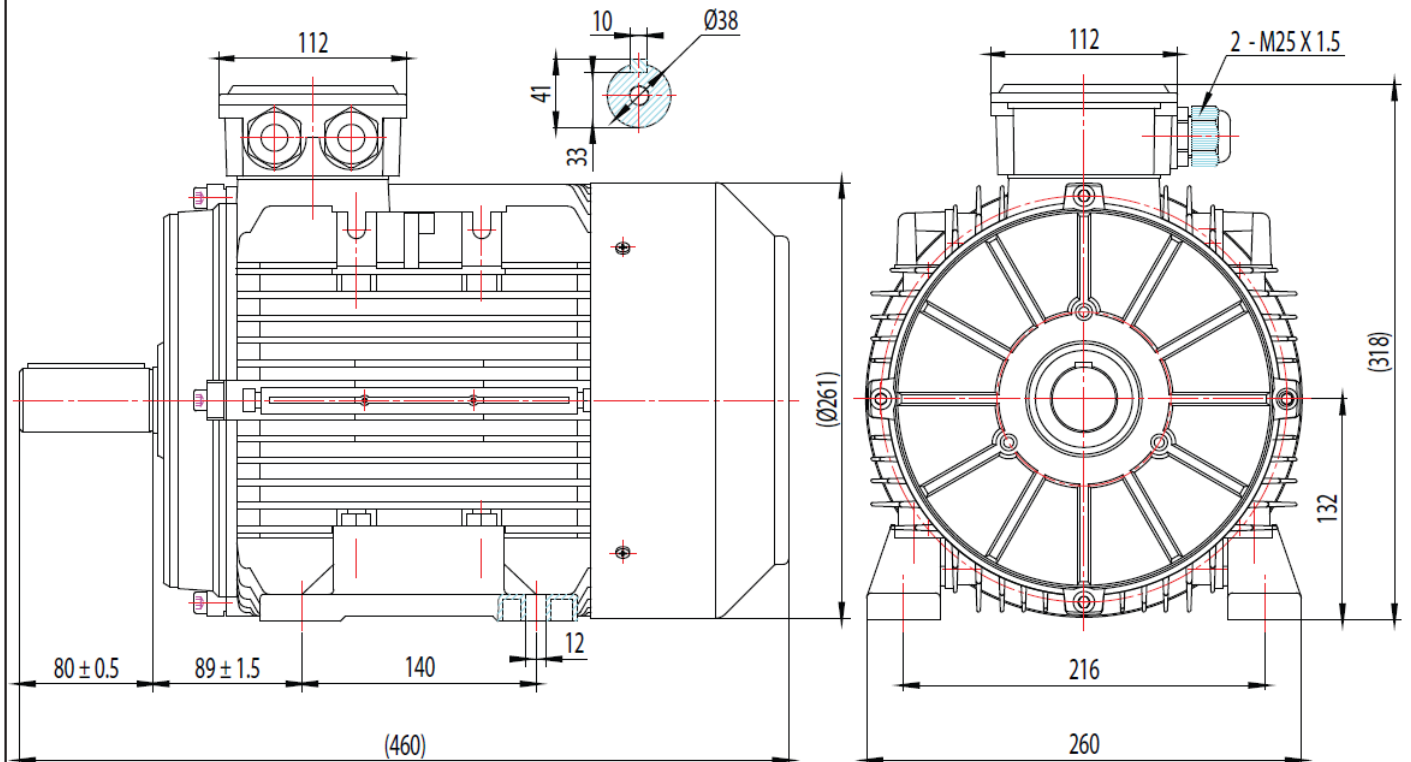

MATERIAL: ALUMINUM
UNITS: INCH BY: SSEE
DRAWN: 6/11/2018
WWW.TECHTOP.COM

MODEL NUMBER:

TA132SB3

MFG PN:

REV. BY DATE

1		
2		
3		
4		
5		
6		
7		

CHANGES

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540