



Model Number GR3-AL-TF-56J-2-B-D-1.5-230|460-60

MFG PN T56 1.5U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	1.5 HP	Frame Size	56
Rated Motor Speed	3500 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	24
Rated Motor Current	3.90/1.95 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	55
KVA Code	M	Insulation Class	F
Nominal Efficiency	84 %	Tropicalization	YES
Nominal Power Factor	0.84 cosθ	Duty	cont
Full Load Torque Ft-Lb	2.432 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	40.5	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	316	19	Rated Altitude (M)	1000
Breakdown	-	372	-	Coating	7061 - Graphite Grey
Pull Up	-	269	-	Shaft Grounding	NO
125% of FL	3483	-	2.35	Brake Voltage (DC)	--
75% of FL	3534	-	1.59	Brake Torque (N-M)	--
50% of FL	3557	-	1.29	Mechanical Data	
No Load	--	-	0.99		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6204ZZ
				Bearing NDE Side	6204ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), $\cos\phi$ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead Dual Voltage
----------------	-------------------------



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD

Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

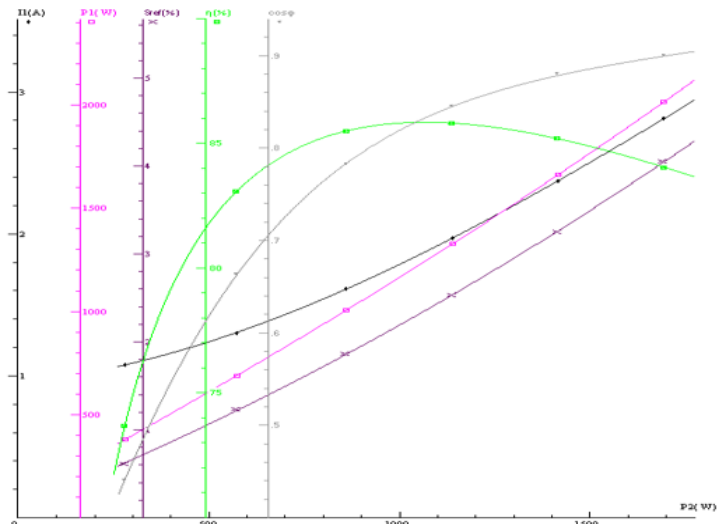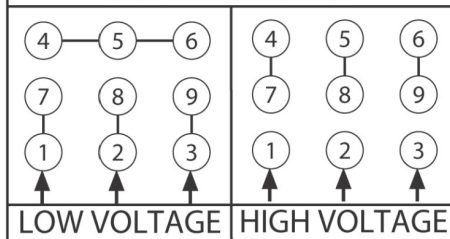

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 56J	HP:	RPM:	PHASE: 3	VOLT: 115/208-230V	ENCL: TEFC	FREQ: 60 Hz	FLA:	LRA:
------------	-----	------	----------	--------------------	------------	-------------	------	------

