TECHTOP electric motors		**Model Number**	**GR3-AL-TF-63B3-4-B-D-.35-230|460-60**
		MFG PN	**T633-4**
		List Price	**--**


All data shown at HIGH voltage setting — Format: STD 3 Phase

Electrical Data		**General Data**	
Rated Motor Output Power	0.35 HP	Frame Size	63
Rated Motor Speed	1715 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230|460-60 Volts - HZ	Approximate Weight	13.2
Rated Motor Current	0.74/0.37 Amps	NEMA Design	B
Service Factor	1.15	IP Rating	55
KVA Code	J	Insulation Class	F
Nominal Efficiency	66 %	Tropicalization	YES
Nominal Power Factor	0.61 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	1.017888 Ft-Lb	Cable Entry	M16 X 1.5
Temp Rise @ Full Load °C	29.1	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	**RPM**	**Trq %FL**	**Current Amps**	Rated Ambient (°C)	40
Locked Rotor	-	273	4.91	Rated Altitude (M)	1001
Breakdown	-	301	-	Coating	7024 - Graphite Grey
Pull Up	-	268	-	Shaft Grounding	NO
125% of FL	1690	-	0.7	Brake Voltage (DC)	--
75% of FL	1742	-	0.56	Brake Torque (N-M)	--
50% of FL	1763	-	0.52	**Mechanical Data**	
No Load	--	-	0.5	Bearing DE Side	6201ZZ
Hazardous Location	**Class 1, Div 2, Grp A,B,C,D**			Bearing NDE Side	6201ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)


CT VFD Range	--	**Loaded Torque Curves**	**--**
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosϕ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	**323353**	**224693**	096A
Wiring Diagram	**3PH 9 Lead IEC Dual Voltage**		

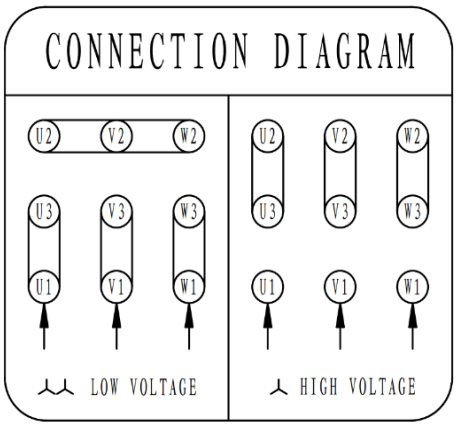

Model Number	GR3-AL-TF-63B3-4-B-D-.35-230|460-60
MFG PN	T633-4
List Price	--
Base Frame	GR-63B3-AL-TF

IEC | TECHTOP electric motors

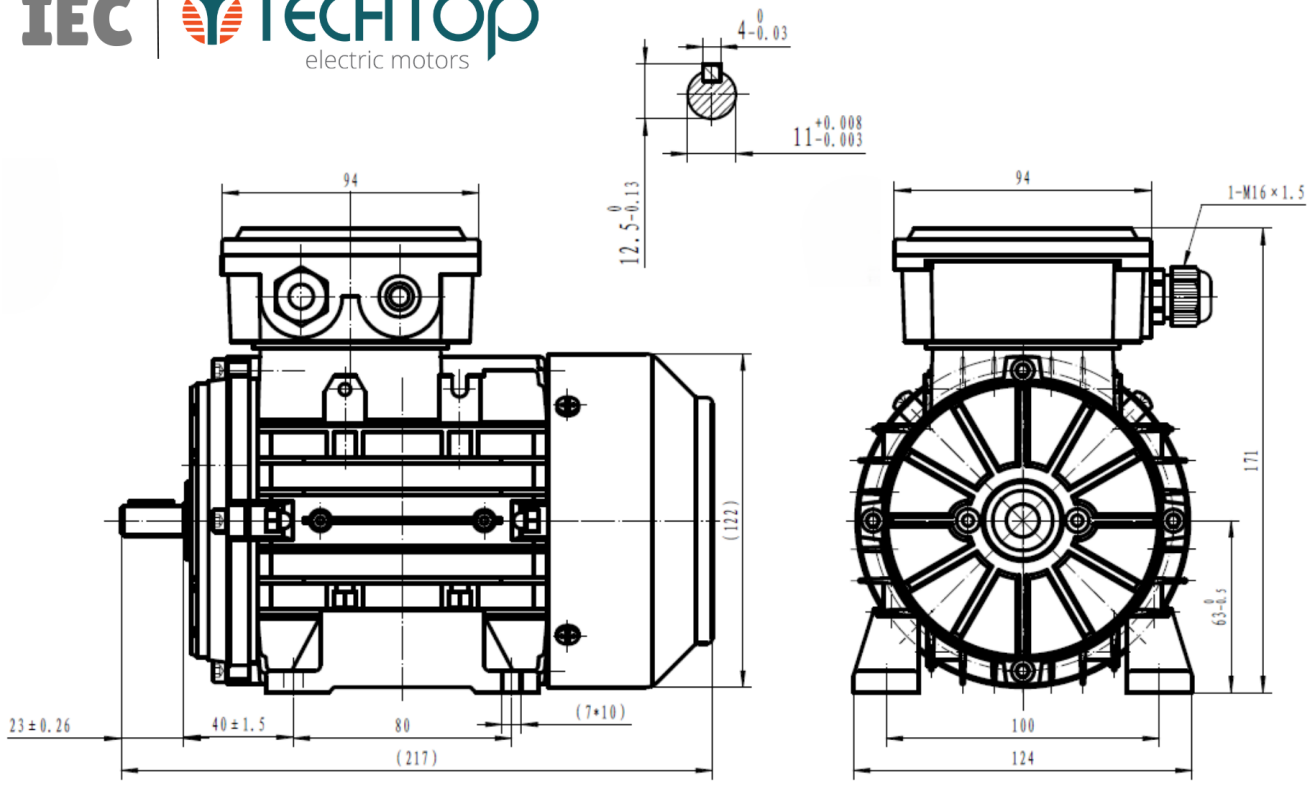

MODEL NUMBER	GR3-63B3-AL-TF	ISSUE DATE:	04/2025
DIMENSIONS	in		
CASTING MATERIAL	ALUMINUM	WWW.TECHTOPIND.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540