



Model Number	GR3-AL-TF-80B3-4-B-D-1.5-230 460-60
MFG PN	T 803-4
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	1.5 HP	Frame Size	80
Rated Motor Speed	1730 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	27.72
Rated Motor Current	4.56/2.28 Amps	NEMA Design	B
Service Factor	1.15	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	86.5 %	Tropicalization	YES
Nominal Power Factor	0.7 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	4.602624 Ft-Lb	Cable Entry	M20 X 1.5
Temp Rise @ Full Load °C	36.8	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	349	16.57	Rated Altitude (M)	1000
Breakdown	-	395	-	Coating	7024 - Graphite Grey
Pull Up	-	339	-	Shaft Grounding	NO
125% of FL	1734	-	2.54	Brake Voltage (DC)	--
75% of FL	1763	-	1.82	Brake Torque (N-M)	--
50% of FL	1776	-	1.57	Mechanical Data	
No Load	--	-	1.35	Bearing DE Side	6204ZZ


Hazardous Location	Class 1, Div 2, Grp A,B,C,D		Bearing NDE Side	6204ZZ
			Moment of Inertia	-- kg.m2
			Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead IEC Dual Voltage
----------------	-----------------------------

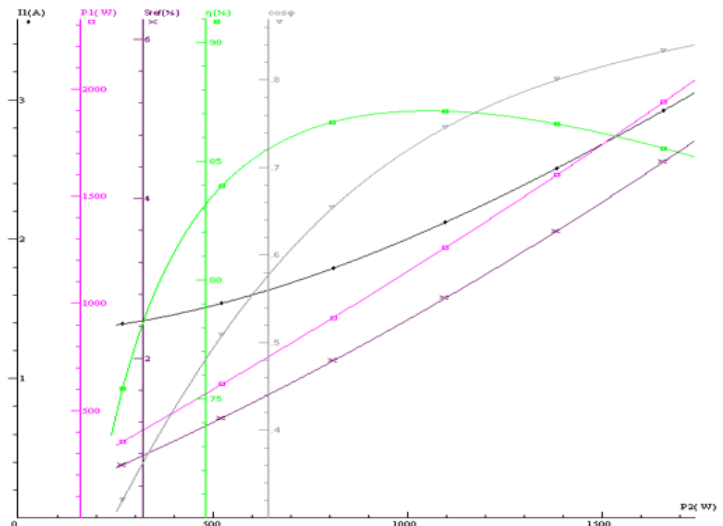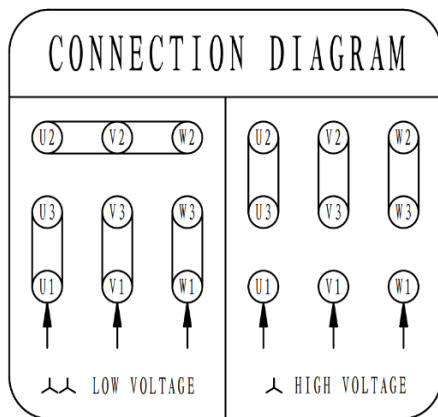

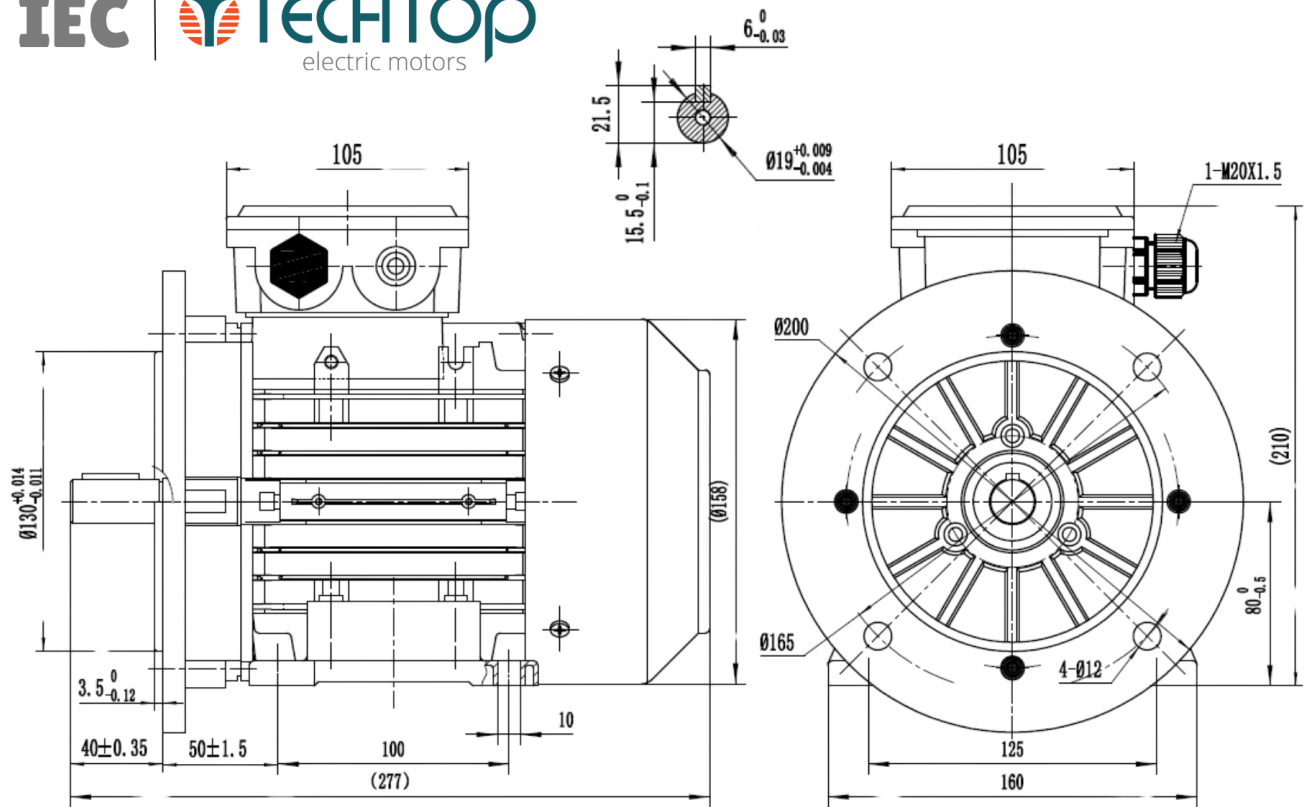

MODEL NUMBER	GR-80B35-AL	ISSUE DATE:	04/2025
DIMENSIONS	in		
CASTING MATERIAL	ALUMINUM	WWW.TECHTOPIND.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540