TECHTOP electric motors	**Model Number**	**GR3-CI-TF-145T-4-B-D-2-230|460-60**	
	MFG PN	**T145T2U4B**	
	List Price	**--**	
All data shown at HIGH voltage setting		Format	STD 3 Phase

Electrical Data		**General Data**	
Rated Motor Output Power	2 HP	Frame Size	145
Rated Motor Speed	1740 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230|460-60 Volts - HZ	Approximate Weight	60
Rated Motor Current	5.6/2.8 Amps	NEMA Design	BE
Service Factor	1.25	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	86.5 %	Tropicalization	YES
Nominal Power Factor	0.78 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	3.02416 Ft-Lb	Cable Entry	3/4"-14 NPSC
Temp Rise @ Full Load °C	50	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	**RPM**	**Trq %FL**	**Current Amps**	Rated Ambient (°C)	40
Locked Rotor	-	282	20.71	Rated Altitude (M)	1000
Breakdown	-	304	-	Coating	7024 - Graphite Grey
Pull Up	-	175	-	Shaft Grounding	NO
125% of FL	1722	-	3.36	Brake Voltage (DC)	--
75% of FL	1758	-	2.26	Brake Torque (N-M)	--
50% of FL	1772	-	1.85	**Mechanical Data**	
No Load	1799	-	1.46	Bearing DE Side	6205 ZZ
Hazardous Location	**Class 1, Div 2, Grp A,B,C,D**			Bearing NDE Side	6205 ZZ
				Moment of Inertia	0.00430 kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	**Loaded Torque Curves**	**--**

P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosϕ = Power Factor


Certifications	UL	CSA	DOE
File Numbers	**323353**	**224693**	096A
Wiring Diagram	**3PH 9 Lead Dual Voltage**		


3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD


Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

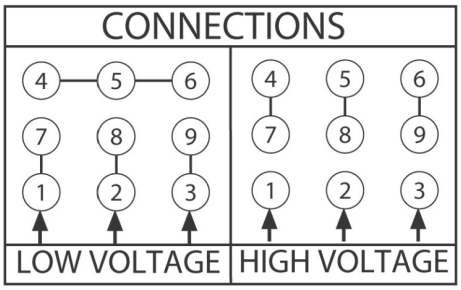

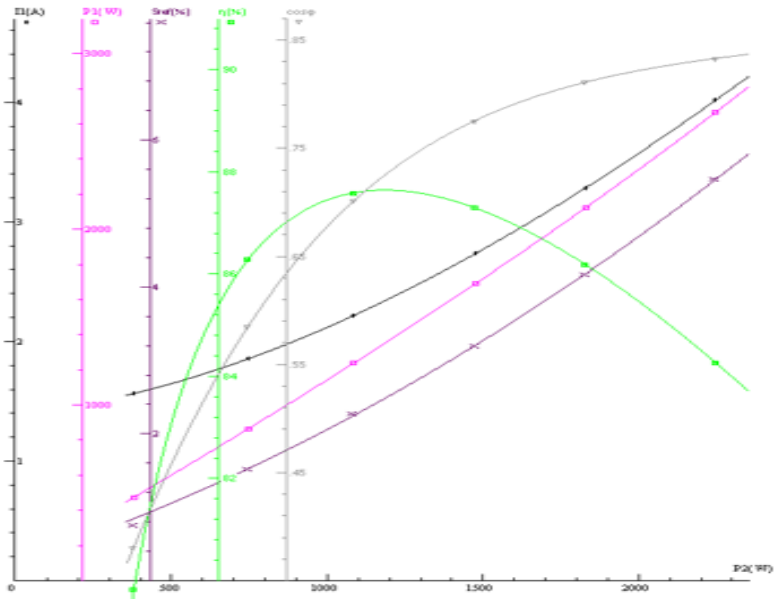

Model Number	GR3-CI-TF-145T-4-B-D-2-230|460-60
MFG PN	T145T2U4B
List Price	--
Base Frame	GR-145T-CI-TF

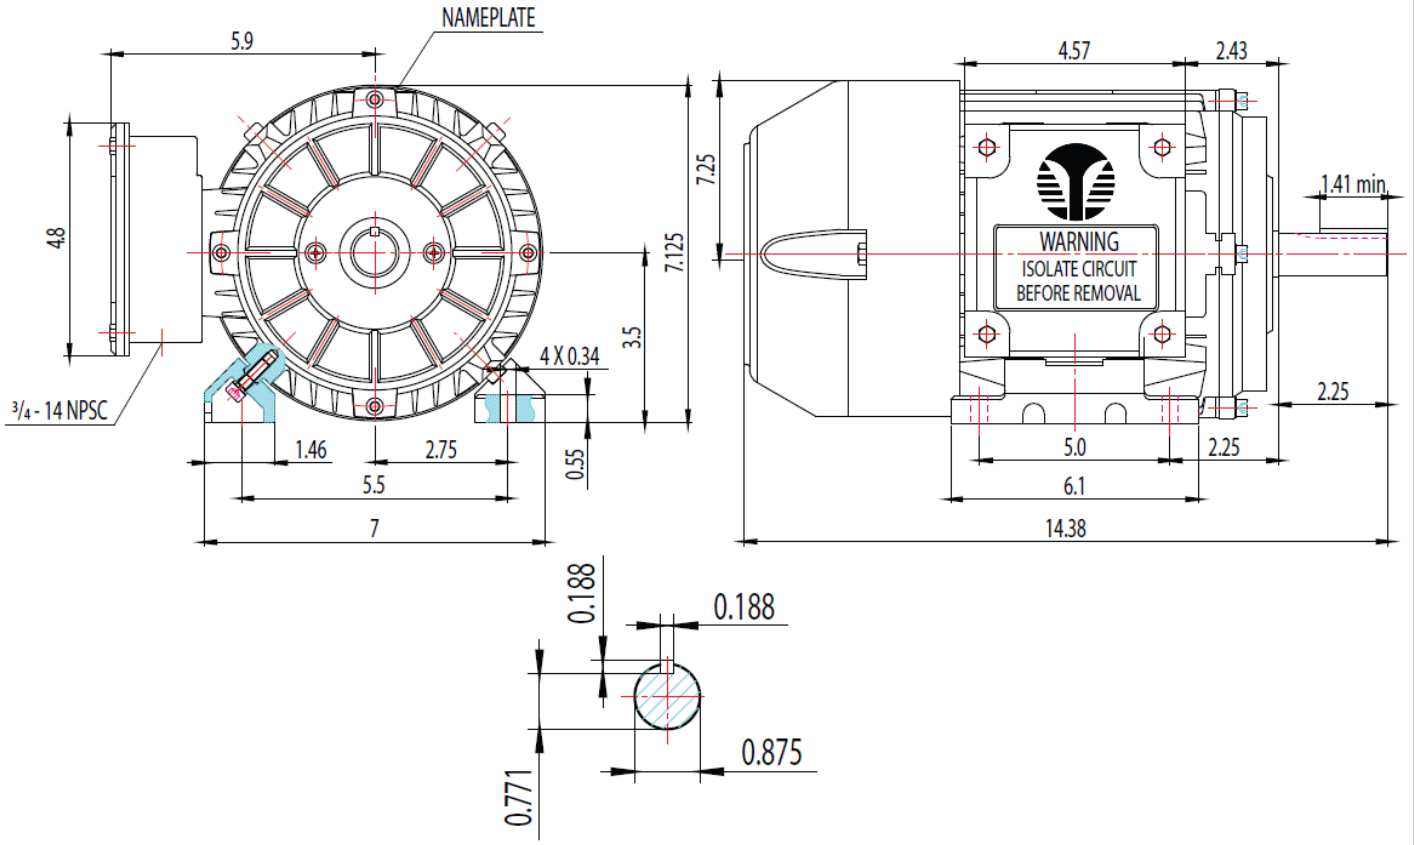

TECHTOP	MODEL NUMBER:	REV.	BY	DATE	CHANGES
	GR3-CI-TF-145T	1			
	MFG PN:	2			
MATERIAL: ALUMINUM		3			
UNITS: INCH BY: SSEE		4			
DRAWN: 6/15/2018		5			
WWW.TECHTOP.COM		6			
		7			