



Model Number GR3-CI-TF-145TC-6-B-D-1-230|460-60

MFG PN TFC145T1U6B


List Price --


All data shown at HIGH voltage setting

Format | STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power	1 HP			Frame Size	145
Rated Motor Speed	1150 r/min			Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ			Approximate Weight	52.8
Rated Motor Current	3.4/1.7 Amps			NEMA Design	B
Service Factor	1.25			IP Rating	55
KVA Code	H			Insulation Class	F
Nominal Efficiency	82.5 %			Tropicalization	YES
Nominal Power Factor	0.68 cosθ			Duty	Cont.
Full Load Torque Ft-Lb	4.602624 Ft-Lb			Cable Entry	1.25
Temp Rise @ Full Load °C	41.5			Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium			Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	213	8.12	Rated Altitude (M)	1000
Breakdown	-	248	-	Coating	7024 - Graphite Grey
Pull Up	-	190	-	Shaft Grounding	NO
125% of FL	1135	-	1.95	Brake Voltage (DC)	
75% of FL	1167	-	1.38	Brake Torque (N-M)	
50% of FL	1179	-	1.19	Mechanical Data	
No Load	1185	-	1	Bearing DE Side	6205 ZZ
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6205 ZZ
				Moment of Inertia	kg.m2
				Noise Level	Per NEMA dB (A)
CT VFD Range		--		Loaded Torque Curves	
				P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor	
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 9 Lead Dual Voltage				
3 Phase - YY/Y - 9 Lead 4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom					
CONNECTIONS 					

FRAME: 145TC | HP: | RPM: | PHASE: 3 | VOLT: 208 - 230/460V | ENCL: TEFC | FREQ: 60 Hz | FLA: | LRA:

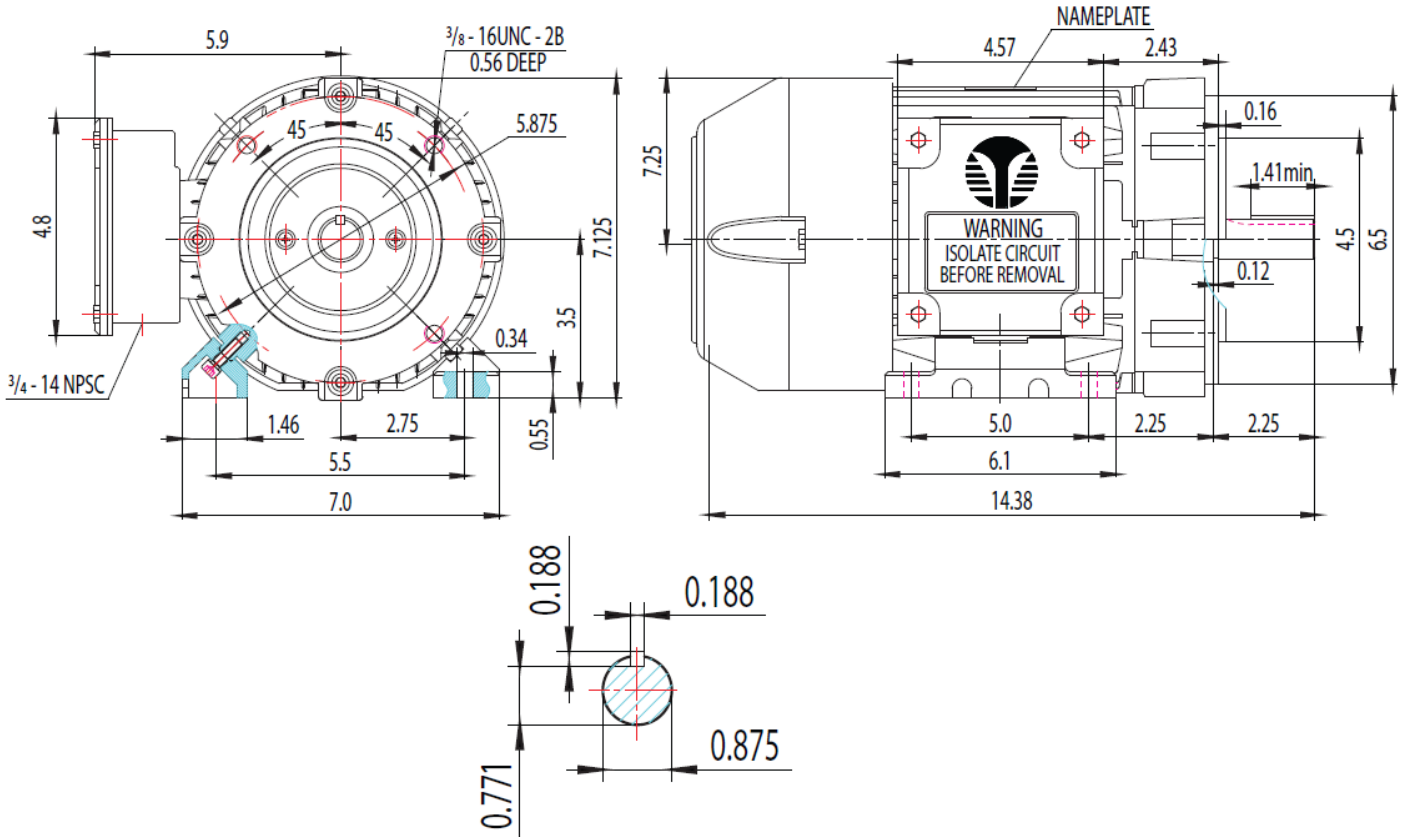

 MATERIAL: UNITS: INCH BY: SSEE DRAWN: 6/15/2018 WWW.TECHTOP.COM	MODEL NUMBER:	GR3-CI-TF-145TC	REV.	BY	DATE	CHANGES
	MFG PN:		1			
			2			
			3			
			4			
			5			
			6			
		7				