



Model Number	GR3-CI-TF-160LB34-2-BR-D-30-230 460-60
MFG PN	T 160L2-2
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	30 HP	Frame Size	160
Rated Motor Speed	3550 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	--
Rated Motor Current	66.9/33.5 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	J	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.9 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	43.7028 Ft-Lb	Cable Entry	M32 X 1.5
Temp Rise @ Full Load °C	67.5	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	310	334.2	Rated Altitude (M)	1000
Breakdown	-	398	-	Coating	7024 - Graphite Grey
Pull Up	-	193	-	Shaft Grounding	NO
125% of FL	3546	-	40.28	Brake Voltage (DC)	--
75% of FL	3569	-	25	Brake Torque (N-M)	--
50% of FL	3579	-	18	Mechanical Data	
No Load	3591	-	9	Bearing DE Side	6309 C3

Hazardous Location	Class 1, Div 2, Grp A,B,C,D		Bearing NDE Side	6309 C3
			Moment of Inertia	-- kg.m2
			Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead IEC Dual Voltage
----------------	------------------------------

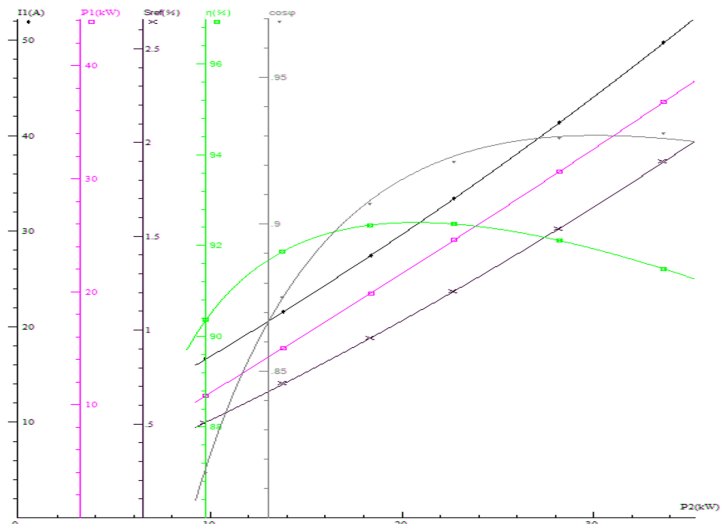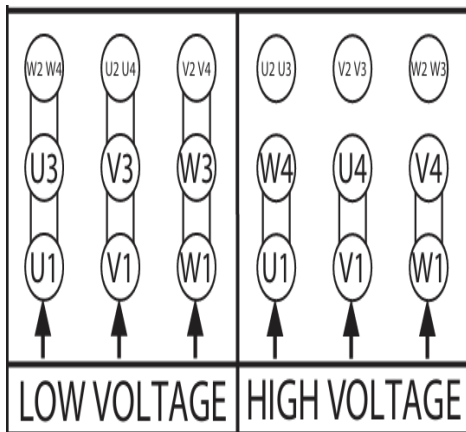

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 160LB34-CFC HP: RPM: PHASE: 3 VOLT: ENCL: TEFC FREQ: 60 Hz FLA: LRA:

