
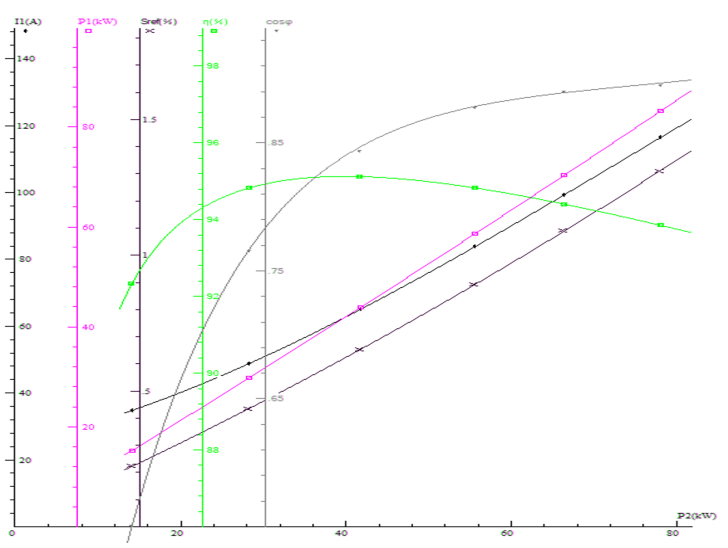


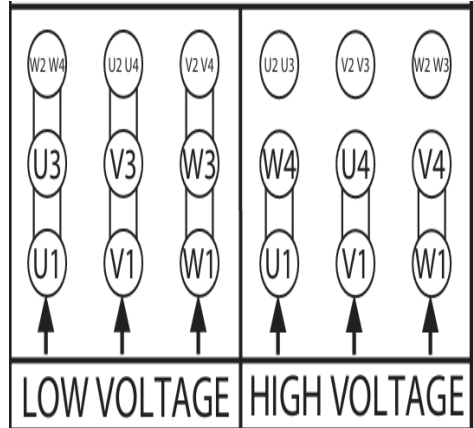


Model Number	GR3-CI-TF-250MB35-4-BR-D-75-230 460-60
MFG PN	T 250M1-4
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power		75 HP		Frame Size	250
Rated Motor Speed		1775 r/min		Enclosure	TEFC
Rated Motor Voltage (3 Phase)		230 460-60 Volts - HZ		Approximate Weight	979
Rated Motor Current		166.3/83.2 Amps		NEMA Design	A
Service Factor		1.15		IP Rating	55
KVA Code		H		Insulation Class	F
Nominal Efficiency		95.4 %		Tropicalization	YES
Nominal Power Factor		0.87 cosθ		Duty	Cont.
Full Load Torque Ft-Lb		0 Ft-Lb		Cable Entry	M50 X 1.5
Temp Rise @ Full Load °C		66.1		Feet Removable	YES
Efficiency Level		IE3 - NEMA Premium		Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	332	821	Rated Altitude (M)	1000
Breakdown	-	322	-	Coating	7024 - Graphite Grey
Pull Up	-	189	-	Shaft Grounding	NO
125% of FL	1780	-	102.72	Brake Voltage (DC)	--
75% of FL	1788	-	64.39	Brake Torque (N-M)	--
50% of FL	1792	-	47.97	Mechanical Data	
No Load	--	-	28.05	Bearing DE Side	6313 C3
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6313 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)
CT VFD Range		--	Loaded Torque Curves		--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor					
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 12 Lead IEC Dual Voltage				
					

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

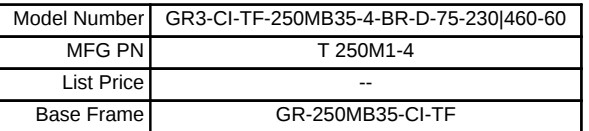

Technical drawing of a 450JS6 motor showing dimensions in mm. The drawing includes a side view and a front view. Key dimensions include: total width 929, total height 550, mounting bracket width 218, and terminal box dimensions 482.5 and 22. The motor body has a diameter of 516 and a length of 443. The terminal box is labeled 2 X M50 X 1.5.

