



Model Number GR3-CI-TF-449TC-4-BR-E-250-460-60

MFG PN T449T250U4B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	250 HP	Frame Size	449
Rated Motor Speed	1785 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ	Approximate Weight	2248
Rated Motor Current	540/270 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	H	Insulation Class	F
Nominal Efficiency	96.2 %	Tropicalization	YES
Nominal Power Factor	0.9 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	735.025776 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	88.4	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	273	2170	Rated Altitude (M)	1000
Breakdown	-	322	-	Coating	7024 - Graphite Grey
Pull Up	-	324	-	Shaft Grounding	NO
125% of FL	1779	-	338.31	Brake Voltage (DC)	--
75% of FL	1788	-	202.07	Brake Torque (N-M)	--
50% of FL	1792	-	141.83	Mechanical Data	
No Load	--	-	58.84		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6319 C3
				Bearing NDE Side	6319 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

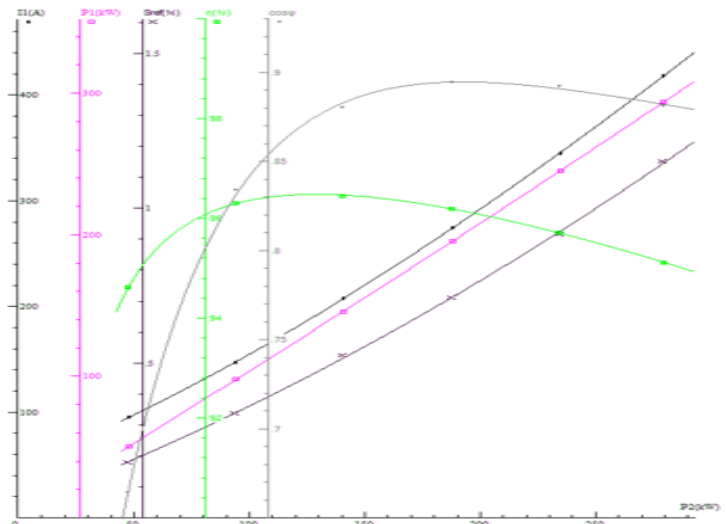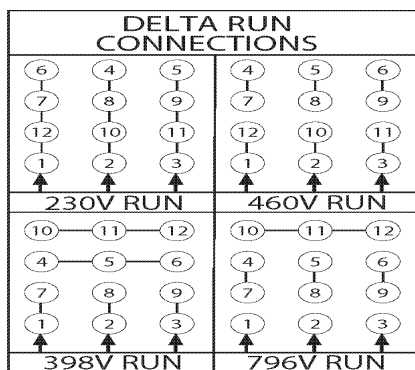



	Model Number	GR3-CI-TF-449TC-4-BR-E-250-460-60
	MFG PN	T449T250U4B
	List Price	--
	Base Frame	GR-449TC-CI-TF
Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540		