



Model Number	GX3-AL-TF-254T-4-B-D-15-230 460-60
MFG PN	T254T15U4B
List Price	--



All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power	15 HP			Frame Size	254
Rated Motor Speed	1770 r/min			Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ			Approximate Weight	197.12
Rated Motor Current	36.0/18.0 Amps			NEMA Design	A
Service Factor	1.25			IP Rating	55
KVA Code	K			Insulation Class	F
Nominal Efficiency	92.4 %			Tropicalization	YES
Nominal Power Factor	0.83 cosθ			Duty	Cont.
Full Load Torque Ft-Lb	43.7264032 Ft-Lb			Cable Entry	1.25
Temp Rise @ Full Load °C	36			Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium			Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	271	173.1	Rated Altitude (M)	1000
Breakdown	-	353	-	Coating	7024 - Graphite Grey
Pull Up	-	152	-	Shaft Grounding	Yes
125% of FL	1766.5	-	21.939	Brake Voltage (DC)	--
75% of FL	1780.8	-	14.361	Brake Torque (N-M)	--
50% of FL	1787.4	-	11.279	Mechanical Data	
No Load	--	-	8.074	Bearing DE Side	6309 C3
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6309 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH 12 Lead Dual Voltage		

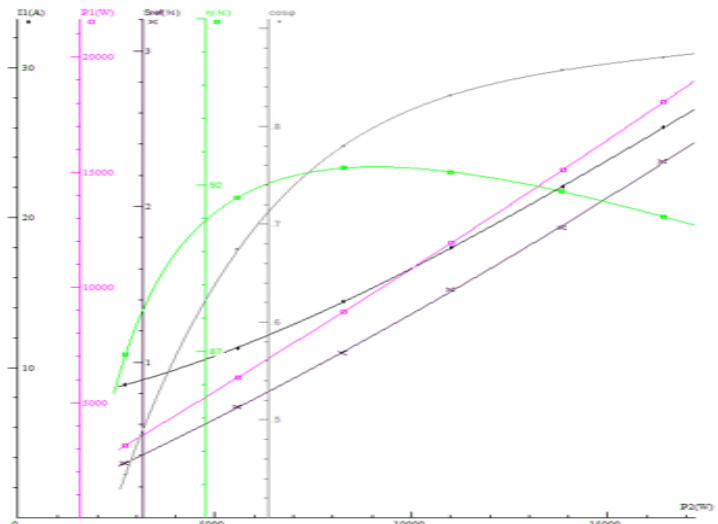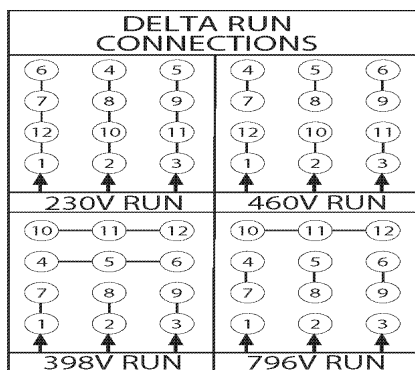






Model Number GX3-AL-TF-254T-4-B-D-15-230|460-60

MFG PN T254T15U4B

List Price --

Base Frame GX-254T-AL-TF

FRAME: HP: RPM: PHASE: VOLT: ENCL: FREQ: FLA: LRA:

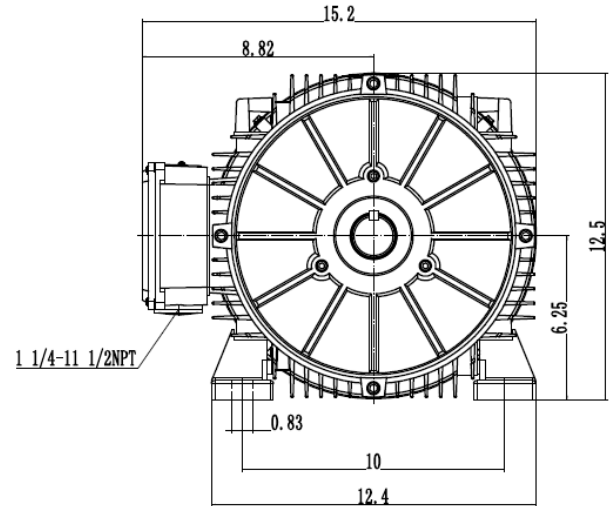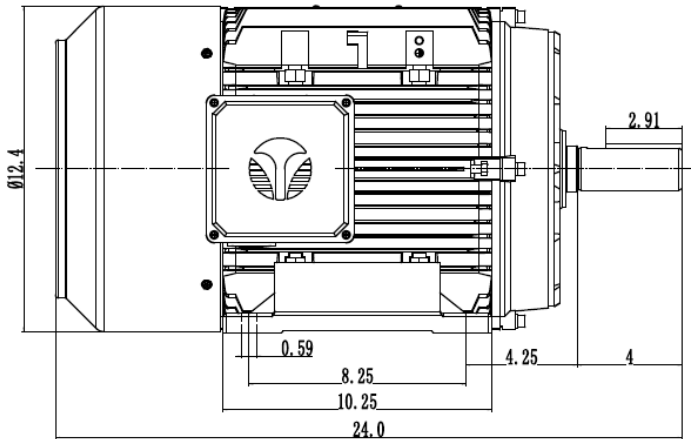

MODEL: NEMA254T
REV.DISC:

SCALE: 1:3.5
VERSION:

DATE:
REVISED:

UNITS:
BY:

WWW.TECHTOP.COM

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540