



Model Number PC3-CI-TF-215T-4-B-D-10-230|460-60

MFG PN T215T10U4B




List Price --


All data shown at HIGH voltage setting

Format | STD 3 Phase

Electrical Data				General Data																																																																									
Rated Motor Output Power	10 HP			Frame Size	215																																																																								
Rated Motor Speed	1750 r/min			Enclosure	TEFC																																																																								
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ			Approximate Weight	173.8																																																																								
Rated Motor Current	24.8/12.4 Amps			NEMA Design	B																																																																								
Service Factor	1.25			IP Rating	55																																																																								
KVA Code	G			Insulation Class	F																																																																								
Nominal Efficiency	89.5 %			Tropicalization	YES																																																																								
Nominal Power Factor	84 cosθ			Duty	CONT																																																																								
Full Load Torque Ft-Lb	30.4584544 Ft-Lb			Cable Entry	1.25																																																																								
Temp Rise @ Full Load °C	78.4			Feet Removable	YES																																																																								
Efficiency Level	IE2 - High (EPact)			Double Drilled	NO																																																																								
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40																																																																								
Locked Rotor	-	199	80.75	Rated Altitude (M)	1000																																																																								
Breakdown	-	259	-	Coating	7024 - Graphite Grey																																																																								
Pull Up	-	125	-	Shaft Grounding	NO																																																																								
125% of FL	1727.8	-	15.62	Brake Voltage (DC)																																																																									
75% of FL	1762.8	-	9.3946	Brake Torque (N-M)																																																																									
50% of FL	1776.6	-	6.9479	Mechanical Data																																																																									
No Load		-	4.33	Bearing DE Side	6308ZZ																																																																								
Hazardous Location	Class 1, Div2 Grp A,B,C,D			Bearing NDE Side	6308ZZ																																																																								
				Moment of Inertia	kg.m2																																																																								
				Noise Level	Per NEMA dB (A)																																																																								
CT VFD Range		--		Loaded Torque Curves																																																																									
				P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor																																																																									
Certifications	UL	CSA	DOE																																																																										
File Numbers	323353	224693	096A																																																																										
Wiring Diagram	3PH 12 Lead Dual Voltage																																																																												
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center;">DELTA RUN CONNECTIONS</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td>6</td><td>4</td><td>5</td><td>4</td><td>5</td><td>6</td> </tr> <tr> <td>7</td><td>8</td><td>9</td><td>7</td><td>8</td><td>9</td> </tr> <tr> <td>12</td><td>10</td><td>11</td><td>12</td><td>10</td><td>11</td> </tr> <tr> <td>1</td><td>2</td><td>3</td><td>1</td><td>2</td><td>3</td> </tr> <tr> <td colspan="3">↑</td><td colspan="3">↑</td> </tr> <tr> <td colspan="3">230V RUN</td><td colspan="3">460V RUN</td> </tr> <tr> <td>10</td><td>11</td><td>12</td><td>10</td><td>11</td><td>12</td> </tr> <tr> <td>4</td><td>5</td><td>6</td><td>4</td><td>5</td><td>6</td> </tr> <tr> <td>7</td><td>8</td><td>9</td><td>7</td><td>8</td><td>9</td> </tr> <tr> <td>1</td><td>2</td><td>3</td><td>1</td><td>2</td><td>3</td> </tr> <tr> <td colspan="3">↑</td><td colspan="3">↑</td> </tr> <tr> <td colspan="3">398V RUN</td><td colspan="3">796V RUN</td> </tr> </table> </div> </div>						6	4	5	4	5	6	7	8	9	7	8	9	12	10	11	12	10	11	1	2	3	1	2	3	↑			↑			230V RUN			460V RUN			10	11	12	10	11	12	4	5	6	4	5	6	7	8	9	7	8	9	1	2	3	1	2	3	↑			↑			398V RUN			796V RUN		
6	4	5	4	5	6																																																																								
7	8	9	7	8	9																																																																								
12	10	11	12	10	11																																																																								
1	2	3	1	2	3																																																																								
↑			↑																																																																										
230V RUN			460V RUN																																																																										
10	11	12	10	11	12																																																																								
4	5	6	4	5	6																																																																								
7	8	9	7	8	9																																																																								
1	2	3	1	2	3																																																																								
↑			↑																																																																										
398V RUN			796V RUN																																																																										

Model Number	PC3-CI-TF-215T-4-B-D-10-230 460-60
MFG PN	T215T10U4B
List Price	--
Base Frame	PC-215T-CI-TF

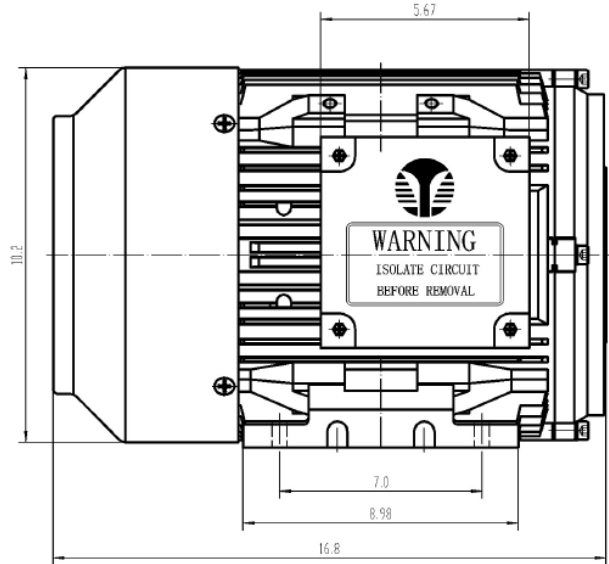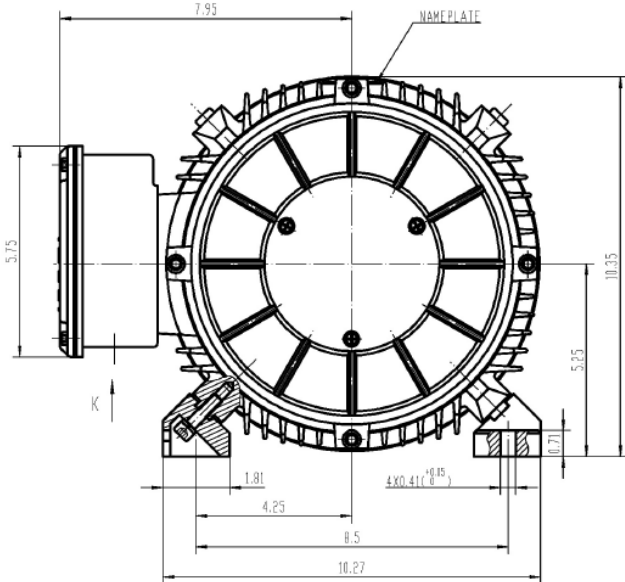

 ShangHai HIMAK Electrical Machinery CO.,LTD			NEMA TEFC 215T			
			NO:	TFCR215T10U4B		
Design	yang	Standard	STEP MARK	1:2.5	SORT	Cast iron Motor
Checker		Allow				
Auditing		Date				