



Model Number SD3-444TS-2-BR-E-125-460-60


MFG PN T444TS125U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase


Electrical Data				General Data	
Rated Motor Output Power	125 HP			Frame Size	444
Rated Motor Speed	3560 r/min			Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ			Approximate Weight	1343.3
Rated Motor Current	137 Amps			NEMA Design	B
Service Factor	1.15			IP Rating	56
KVA Code	G			Insulation Class	F
Nominal Efficiency	95 %			Tropicalization	YES
Nominal Power Factor	0.9 cosθ			Duty	Cont.
Full Load Torque Ft-Lb	248 Ft-Lb			Cable Entry	1.25
Temp Rise @ Full Load °C	81.8			Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium			Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	172	816	Rated Altitude (M)	1000
Breakdown	-	231	-	Coating	7024 - Graphite Grey
Pull Up	-	94	-	Shaft Grounding	YES
125% of FL	3553	-	173.61	Brake Voltage (DC)	--
75% of FL	3575	-	101.2	Brake Torque (N-M)	--
50% of FL	3584	-	69.68	Mechanical Data	
No Load	3599	-	23.47	Bearing DE Side	6316 C3
Hazardous Location	CL1 Div2 Grp A,B,C,D			Bearing NDE Side	6316 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)
				Loaded Torque Curves	
CT VFD Range		--		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor	
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH Single Voltage SD3				

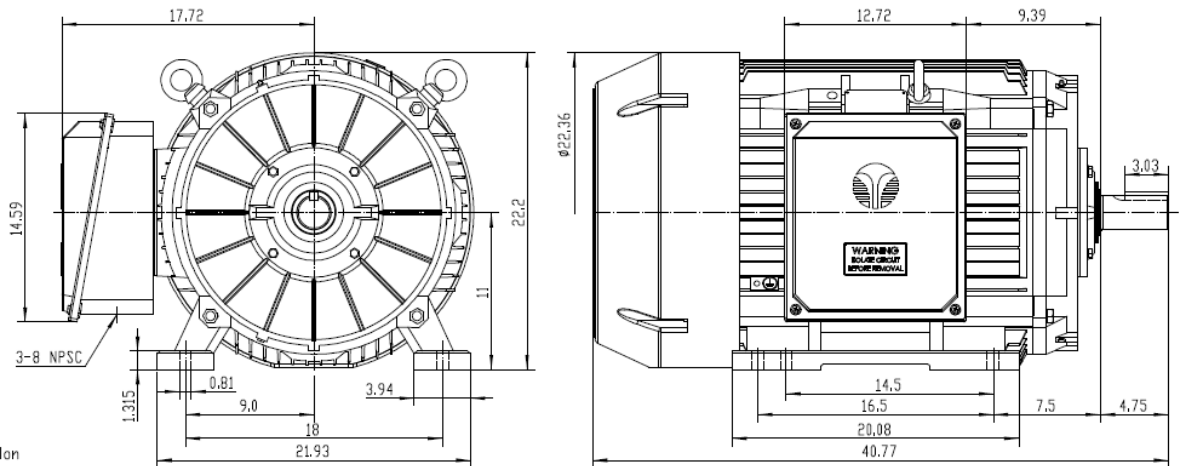

NOTES:

1. All Cast Iron Construction
2. Design B
3. IP55 Labyrinth seals on DE and ODE
4. H Class Insulation System
5. Max Winding Temperature rise 80°C
6. Max bearing temperature rise 45°C for 4 pole and 50°C for 2 pole motors when direct coupled.
7. Regreasable bearings
8. External Grounding provisions
9. Maximum foot flatness deviation .127 mm
10. Conductive Polymer Cooling Fan
11. Diagonally Split Conduit Box rotatable in 90° Increments
12. Lead seals in conduit box
13. Maximum no load sound power 85 dBA(2 pole),
Maximum no load sound power 70 dBA(4 pole),
Maximum no load sound power 64 dBA(6 pole).
14. No Load Motor Vibration not to exceed
a. Radial 60HZ - 2.03mm/s (2,4 pole) and 1.52mm/s (6 pole)
b. Axial 60HZ - 1.52mm/s
15. 300 series Stainless Steel hardware
16. Epoxy Coating meeting ASTM B117-97 for 96 h
17. All internal surfaces coated with anti-corrosion coating.
18. Internal Shaft Grounding brush installed on drive end.
19. No Load test report included with motor

TECHTOP IEEE 841 SEVERE DUTY ELECTRIC MOTOR	
MODEL SD3-444T-2-BR-E-125	TECHTOP.COM
NEMA HP 125	MFG PN T444TS125U2B
RPM 3540	SER # 1603102050
VOLT(3Ø) 460	DATE 080608Z
FLA 137	DESIGN B
SF 1.15	FRAME 444TS
KVA CODE 0	ENCL TEFC
NOM EFF 0.950	IP 55
ARC ARRESTOR CODE 8715-23	DUTY Cont.
VFD 15-1 CT-1.0 SF	INS CL H
	AMB 40 C
	WEIGHT 1491.1 lbs
	MADE IN CHINA



 ShangHai HIMAK Electrical Machinery CO., LTD		NEMA TEFC 444TS-125HP-2P	
		IEEE-841 UNITS:INCH	
Design	Standard	NO:	CY260.A20.001
Checker	Allow	STEP MARK	1:6.5 SORT Cast iron Motor
Auditing	Date		