



Model Number

SD3-284T-4-BR-E-25-460-60

MFG PN

T284T25U4B

List Price

--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	25 HP	Frame Size	284
Rated Motor Speed	1770 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ	Approximate Weight	360.14
Rated Motor Current	30.5 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	56
KVA Code	--	Insulation Class	F
Nominal Efficiency	-- %	Tropicalization	YES
Nominal Power Factor	-- cosθ	Duty	Cont.
Full Load Torque Ft-Lb	100 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	54.4	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	General Data	
Locked Rotor	-	193	179.8	Rated Ambient (°C)	40
Breakdown	-	239	-	Rated Altitude (M)	1000
Pull Up	-	149	-	Coating	7024 - Graphite Grey
125% of FL	1759	-	37.63	Shaft Grounding	YES
75% of FL	1778	-	23.42	Brake Voltage (DC)	--
50% of FL	1793	-	12.94	Brake Torque (N-M)	--
No Load	1798	-	10.89	Mechanical Data	


Hazardous Location	CL1 Div2 Grp A,B,C,D			Bearing DE Side	6311 C3
				Bearing NDE Side	6311 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	
$P1 = \text{INPUT POWER (KW)}$, $S = \text{Slip (\% of Sync RPM)}$, $\eta = \text{Efficiency (\%)}$, $\cos\phi = \text{Power Factor}$			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram 3PH Single Voltage SD3

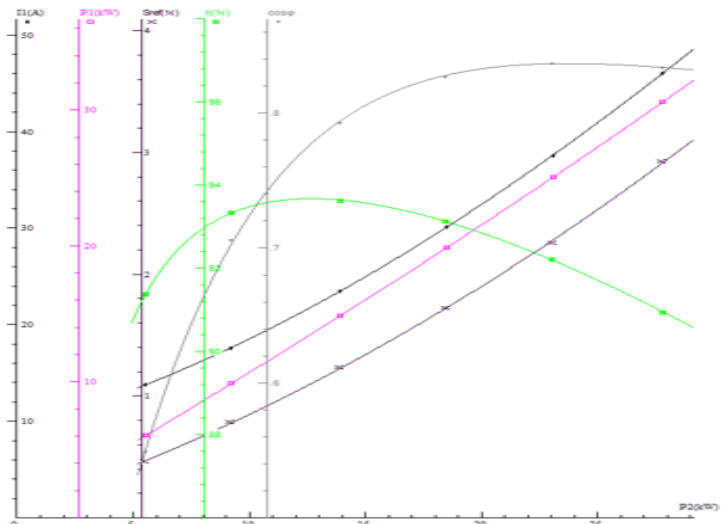
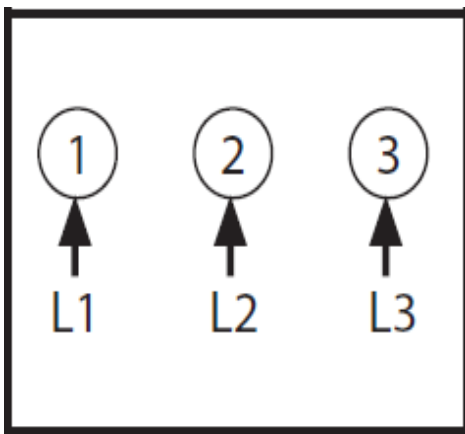


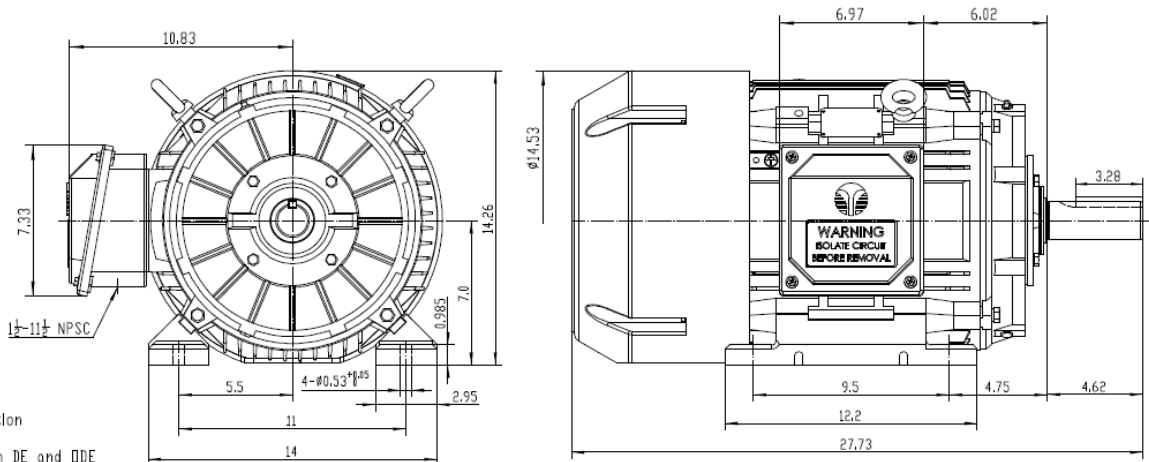

NOTES:

1. All Cast Iron Construction
2. Design B
3. IP55 Labyrinth seals on DE and DDE
4. H Class Insulation System
5. Max Winding Temperature rise 80°C
6. Max bearing temperature rise 45°C for 4 pole and 50°C for 2 pole motors when direct coupled.
7. Regreasable bearings
8. External Grounding provisions
9. Maximum foot flatness deviation .127 mm
10. Conductive Polymer Cooling Fan
11. Diagonally Split Conduit Box rotatable In 90° Increments
12. Lead seals in conduit box
13. Maximum no load sound power 85 dBA(2 pole), Maximum no load sound power 70 dBA(4 pole), Maximum no load sound power 64 dBA(6 pole).
14. No Load Motor Vibration not to exceed
 - a. Radial 60HZ - 2.03mm/s (2,4 pole) and 1.52mm/s (6 pole)
 - b. Axial 60HZ - 1.52mm/s
15. 300 series Stainless Steel hardware
16. Epoxy Coating meeting ASTM B117-97 for 96 h
17. All internal surfaces coated with anti-corrosion coating.
18. Internal Shaft Grounding brush Installed on drive end.
19. No Load test report included with motor

TECHTOP IEEE 841 SEVERE DUTY ELECTRIC MOTOR	
MODEL SD3-284T-6-BR-E-15	TECHTOP.COM
NEMA 15	50 Hz
HP 15	15
RPM 1180	975
VOLTS 460	380
FLA 20.2	23.8
SF 1.25	1
NMA CODE G	E
NOM EFF 0.917	
INS CL H	
AMB 40 °C	
WEIGHT 352.9 lbs	
VFD 15:1 CT-1.0 SF	MADE IN CHINA



<p>ShangHai HIMAK Electrical Machinery CO., LTD</p>		NEMA TEFC 284T-15HP-6P	
		IEEE-841 UNITS:INCH	
Design	Standard	NO:	CY256.A20.003
Checker	Allow	STEP MARK	14.5 SORT Cast iron Motor
Auditing	Date		